

THE HOLD-DOWN PLATE SHALL CONFORM TO AASHTO M270 GRADE 36. AFTER FABRICATION, THE HOLD-DOWN PLATE SHALL BE HOT-DIP GALVANIZED IN ACCORDANCE

BOLTS SHALL CONFORM TO THE REQUIREMENTS OF ASTM A307 AND NUTS SHALL CONFORM TO THE REQUIREMENTS M291. BOLTS, NUTS AND WASHERS SHALL


CONFORM TO THE REQUIREMENTS OF ASIM A307 AND NUTS SHALL CONFORM TO THE REQUIREMENTS OF AASHTO M291. BOLTS, NUTS AND WASHERS SHALL BE GALVANIZED. AT THE CONTRACTOR'S OPTION, STAINLESS STEEL BOLTS, NUTS AND WASHERS MAY BE USED AS AN ALTERNATE FOR THE 1/8" Ø GALVANIZED BOLTS, NUTS AND WASHERS. THEY SHALL CONFORM TO OR EXCEED THE MECHANICAL REQUIREMENTS OF ASTM A307. THE USE OF THIS ALTERNATE SHALL BE APPROVED BY THE ENGINEER.

AFTER INSTALLATION, THE EXPOSED THREAD OF THE BOLT SHALL BE BURRED WITH A SHARP POINTED TOOL.


THE COST OF THE GUARDRAIL ANCHOR ASSEMBLIES WITH BOLTS, NUTS AND WASHERS COMPLETE IN PLACE, SHALL BE INCLUDED IN THE VARIOUS PAY ITEMS.

THE VERTICAL REINFORCING BARS MAY BE SHIFTED SLIGHTLY IN THE END POST TO CLEAR ASSEMBLY BOLTS.


THE $1^{1}/_{4}{}^{\prime\prime}$ Ø HOLES SHALL BE FORMED OR DRILLED WITH A CORE BIT. IMPACT TOOLS WILL NOT BE PERMITTED. ANY CONCRETE DAMAGED BY THIS WORK SHALL BE REPAIRED TO THE SATISFACTION OF THE ENGINEER.

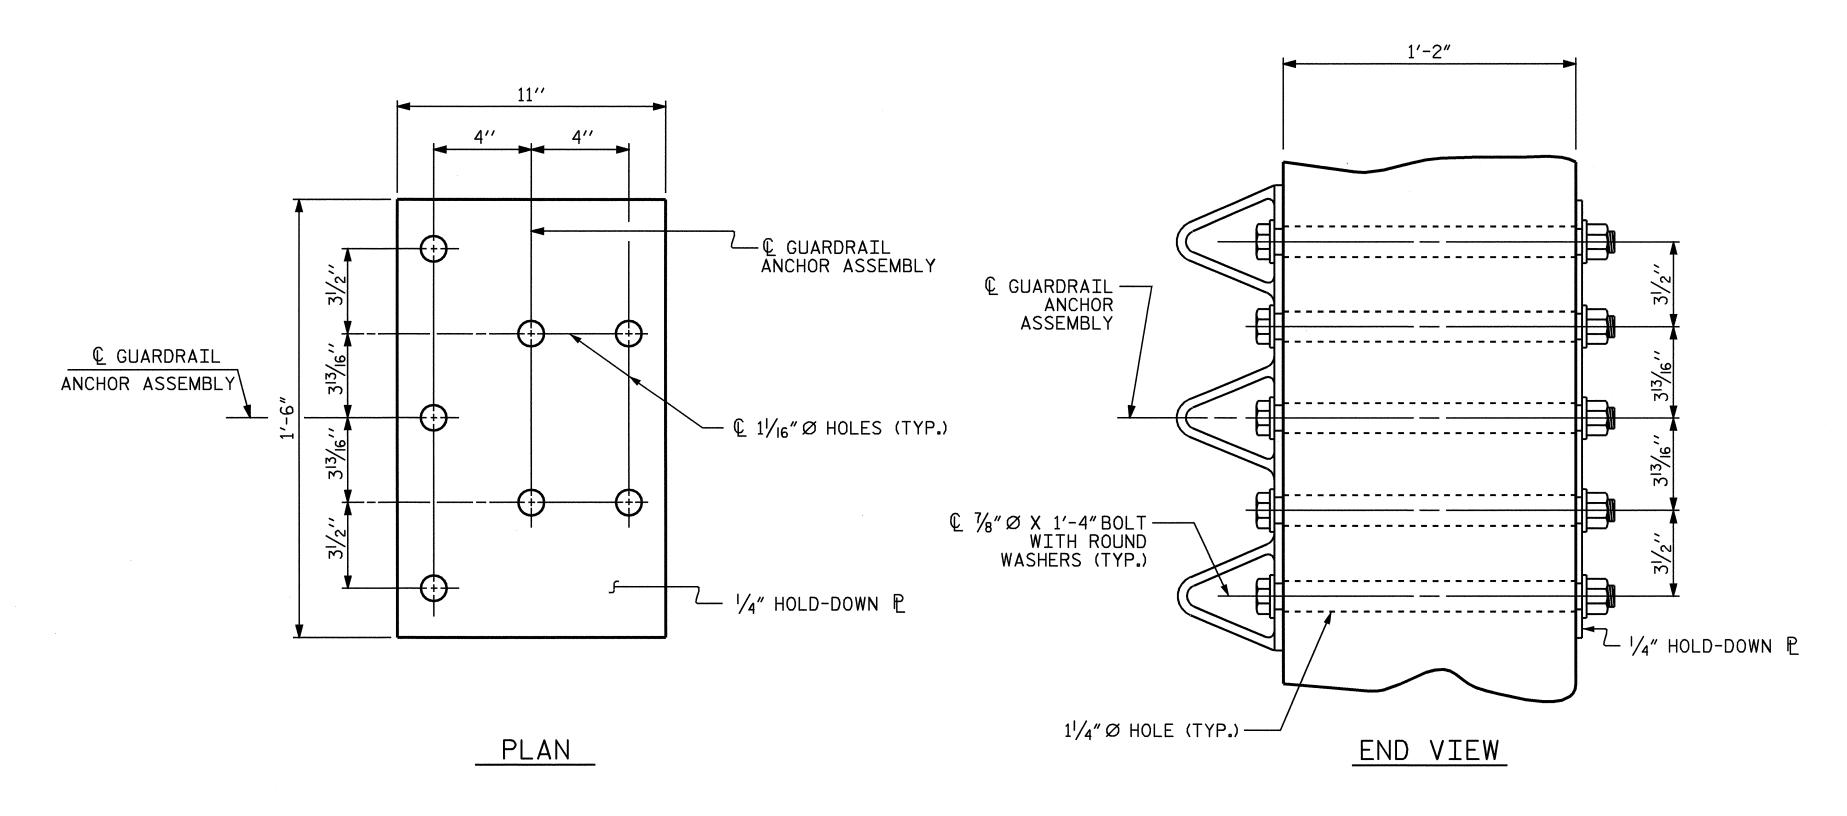

GUARDRAIL ANCHOR ASSEMBLY DETAILS

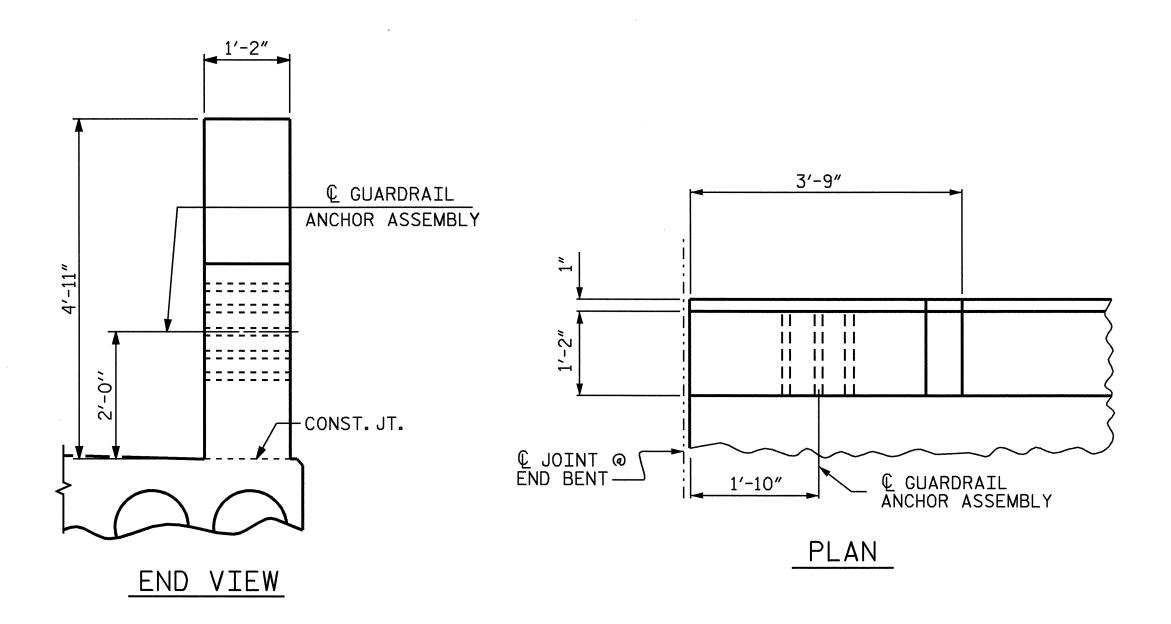

LOCATION OF GUARDRAIL ANCHOR AT END POST

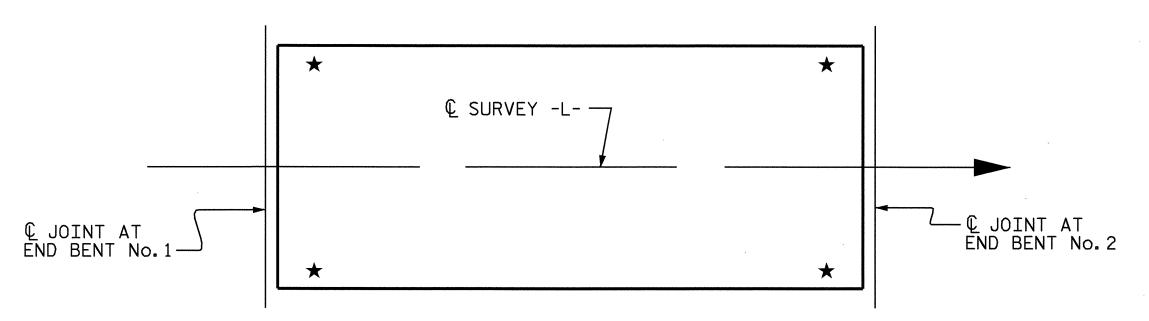

SKETCH SHOWING POINTS OF ATTACHMENT

★ LOCATION OF GUARDRAIL ATTACHMENT

PROJECT NO. B-3348

HYDE COUNTY

STATION: 18+34.00 -L-

SEAL 10757 COUTLAND C. OUTLAND C.

DEPARTMENT OF TRANSPORTATION
RALEIGH
STANDARD

GUARDRAIL ANCHORAGE
DETAILS
FOR METAL RAILS

JUNE FOR METAL RAILS
199

' !					1001
REVISIONS					SHEET NO.
BY:	DATE:	NO.	BY:	DATE:	S-15
		3		·	TOTAL SHEETS
		4			76
	СТ		NIO	DMDO	STR. #1

ASSEMBLED BY: P.C. BREWER DATE:1/14/04 CHECKED BY: A.C. OUTLAW DATE:1/27/04

DRAWN BY: EEM 6/94 REV. 8/16/99 RWW/LES REV. 10/17/00 RWW/LES REV. 5/7/03 RWW/JTE

26-MAY-2004 07:04
W:\squadv\b3348\str1\pbrewer\Microstation\B3348_sd_2MR_01.dgn
pbrewer